

With its innovative manufacturing process, the KaliBlock is an LED block that is entirely made in France, thinner (from 20mm), can be dismantled and recycled.



OUR COMMITMENTS



Dismountable and repairable



Recyclable




IP65



16-day lead time from validation of technical drawings to delivery



Up to 5 year guarantee



SPECIFICATIONS

PRODUCT SPECIFICATION

Material: PMMA (Acrylic)

Paint: RAL® or Pantone®

Vinyl: 3M® 3630 and Avery Dennison® 4500TF

Mounting: Threaded rods / spacer

Voltage: 12 V

Production: CE-certified components

Protection rating: IP 65

Sign resistance: -10 to 50 degrees

Fire class certification: PMMA certificate (M4)

LED SPECIFICATION

Brightness: Up to 3000 cd/m²

LED source LUM flux: 55 Lumen

Efficiency of finished product: 160 Lumen/watt

Power consumption per LED (white): 0.025 Watt


Life span: 90% to 10,000 hours

LED color specified: Yes



Dimmable: Yes

Installation of replacement letters: Yes

DIFFERENT LIGHTING EFFECTS

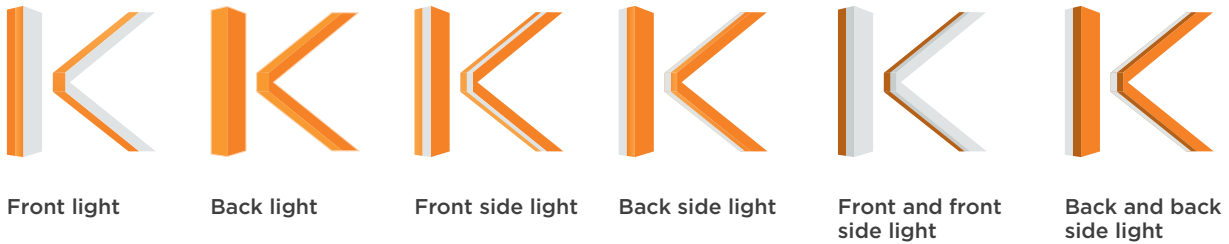

TECHNICAL DRAWING

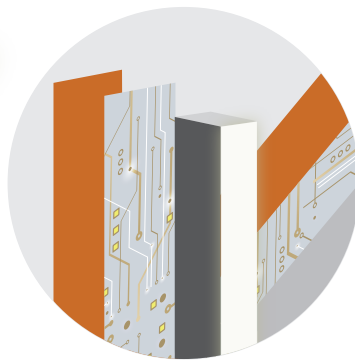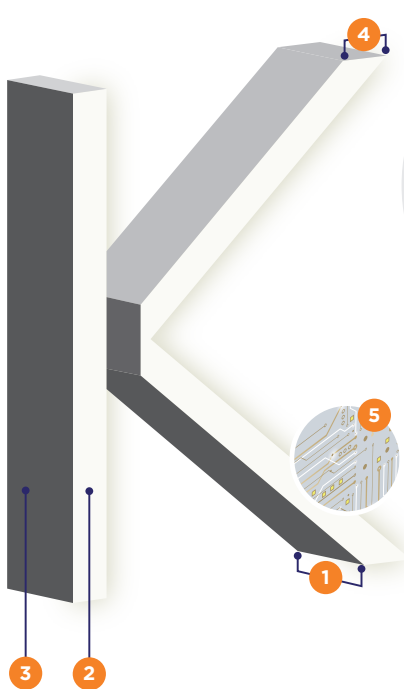

- 1 20 to 30mm thick acrylic
- 2 Illuminated face (acrylic) with vinyl or painted (RAL® or PANTONE®)
- 3 Illuminated or painted returns (RAL® or PANTONE®)
- 4 15mm stroke is the minimum required to insert our PCB
- 5 SMD LEDs

THE KALISIGN SPIRIT

Tailor-made personalized solutions with a wide choice of:

- + RAL® and Pantone® paint
- + Vinyls from the 3M® 3630 and Avery Dennison® 4500TF



Please note: vinyl only fits on the front and back of the sign.

SPECIFIC REQUEST

Thanks to our excellent savoir-faire, we can offer you a wide range of customisation options. Contact our team to find out more!